

**Terminal Dimensions**

### General Series

General Series Valve Regulated Lead Acid batteries are designed with AGM (Absorbent Glass Mat) technology, high performance plates and electrolyte to gain extra power output for common power backup system applications widely used in the field of UPS, Emergency Lighting System.

### Application


- Alarm System
- Cable Television
- Communication Equipment
- Control Equipment
- Security System
- Medical Equipment
- UPS
- Power tools
- Emergency Power System
- Toys

### General Features


- Sealed and maintenance free operation.
- Non-Spillable construction design.
- ABS containers and covers(UL94HB, UL94V-0) optional.
- Safety valve installation for explosion proof.
- High quality and high reliability.
- Exceptional deep discharge recovery performance.
- Low self discharge characteristic.
- Flexibility design for multiple install positions.

### Construction

- Component .....Raw material
- Positive .....Lead dioxide
- Negative .....Lead
- Container .....ABS
- Cover .....ABS
- Sealant .....Epoxy Resin
- Safety valve .....EPDR
- Terminal .....Copper
- Separator .....Fiber glass
- Electrolyte .....Sulfuric acid

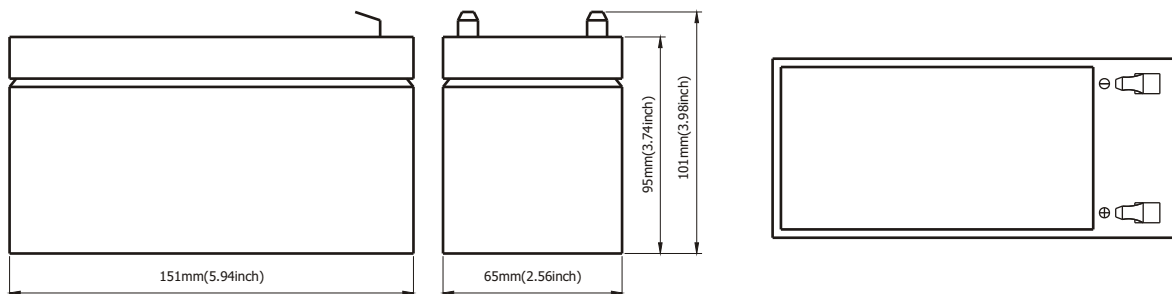

Battery Model	HC12-7.2			
Designed Floating Life	5 Years			
Capacity(25°C)	20HR(0.36A,1.75V)	10HR(0.67A,1.75V)	5HR(1.22A,1.75V)	1HR(4.32A,1.75V)
	7.2AH	6.7AH	6.1AH	4.32AH
Dimensions	Length	Width	Height	Total Height
	151mm(5.94inch)	65mm(2.56inch)	95mm(3.74inch)	101mm(3.98inch)
Approx. Weight	2.23Kg (4.92 lbs)			
Internal Resistance	Full charged at 25°C: 0.029Ω			
Self Discharge	3% of capacity declined per month at (25°C)			
Capacity Affected by Temp.(20HR)	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
Charge Voltage(25°C)	Cycle use		Float use	
	14.4-15V(-30mV/ °C), max. Current: 2.16A		13.6-13.8V(-20mV/ °C)	

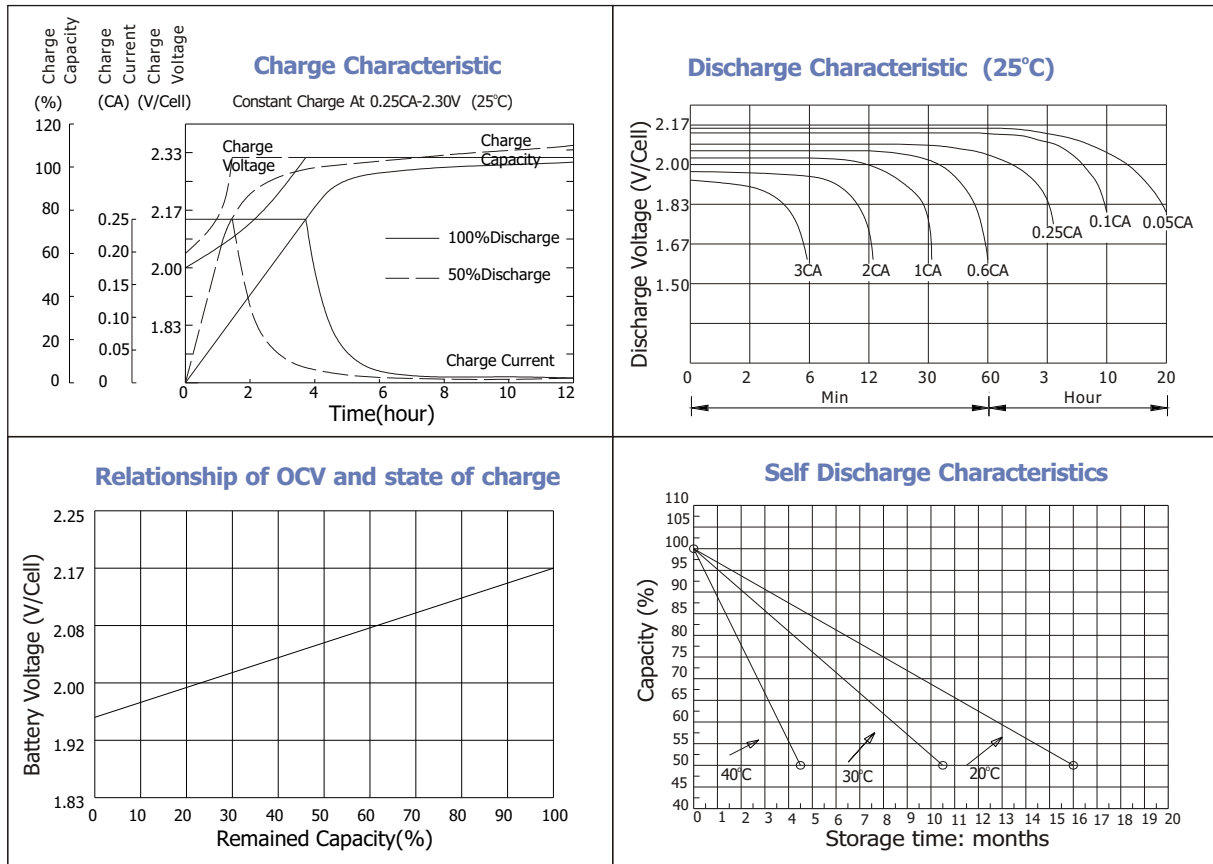

### Constant current discharge ratings-amperes at 25°C - (Valores medios después de 5 ciclos)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1H	3H	5H	10H	20H
1.60V	27.3	17.0	12.8	7.83	4.56	1.83	1.31	0.70	0.39
1.67V	25.7	16.1	12.3	7.49	4.50	1.82	1.27	0.68	0.38
1.70V	23.5	15.6	12.1	6.81	4.46	1.80	1.25	0.67	0.37
1.75V	23.1	15.1	11.7	6.47	4.40	1.77	1.22	0.67	0.36
1.80V	20.6	14.4	10.6	5.99	4.30	1.77	1.16	0.65	0.35
1.85V	18.2	13.7	9.53	5.51	4.10	1.71	1.08	0.63	0.34

### Constant power discharge ratings-watts at 25°C - (Valores medios después de 5 ciclos)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1H	3H	5H	10H	20H
1.60V	48.0	30.7	23.4	14.1	8.88	3.59	2.23	1.36	0.78
1.67V	46.3	29.9	23.1	13.8	8.82	3.56	2.22	1.36	0.76
1.70V	43.6	29.7	22.9	12.9	8.65	3.53	2.19	1.35	0.75
1.75V	43.9	29.6	22.8	12.5	8.51	3.46	2.17	1.33	0.73
1.80V	40.1	29.1	21.1	12.0	8.02	3.36	2.10	1.32	0.71
1.85V	36.4	27.6	19.1	11.2	7.54	3.26	2.04	1.30	0.68

