



Cablematic

REV	DATE	MODIFICATION	DRAWN

Main physical data sheet:

Shield shell : PC

Moisture: more than 750 times mating cycles

MAIN Electric Parameter:

INSULATION RESISTANCE : >500M ohms

CONTACT RESISTANCE: <20m ohms

DIELECTRIC STRENGTH : DC1000V(AC700V)No punctured and overflash phenomenon within one minute



Return loss : 100 MHz , > 10 dB

Insertion loss : 100 MHz , < 24 dB

Next loss : 100 MHz , > 30.1 dB

Attenuation: < 555ns

TIA/EIA : CAT 5E

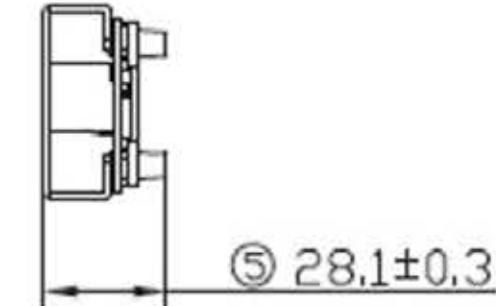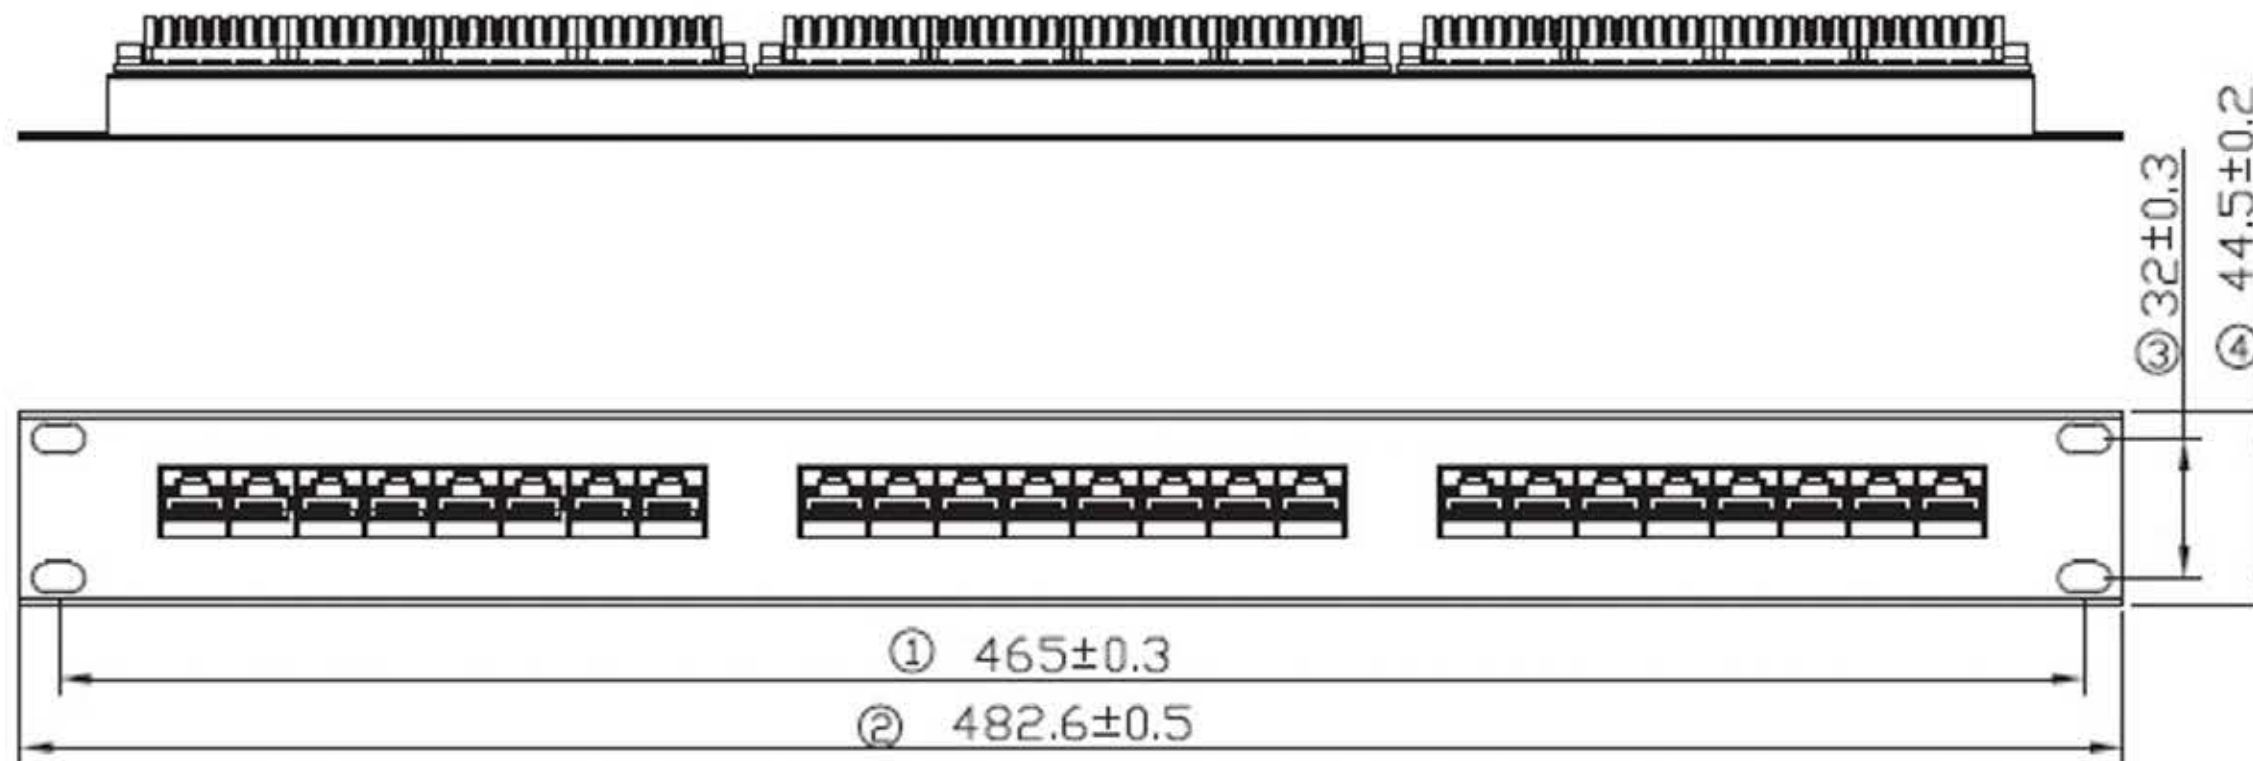

DIMENSION IN mm (Inch) TOLERANCE UNLESS OTHERWISE SPECIFIED		MATERIAL	DWG NO.	
.X±0.20	.X*±5°	TITLE		
.XX±0.10	.XX*±2°			
APPROVAL	CHECKED	DRAWN	SCALE 1/3	SHEET 1/1
			PROJ. 	REV 1